



SUPPLY RANGE	HOUSING MATERIAL	SENSING RANGE NOM., MAX.	MAX. (10SECS)	OUTPUT NOMINAL	MAXIMUM COIL RESISTANCE AT 70°C	NUMBER OF TURNS	DC ACCURACY	PRIMARY PINS
±15 V	GLASS-FILLED POLYESTER	25A	50A	55A	190Ω	2000±1		6, 5, 4 1, 2, 3

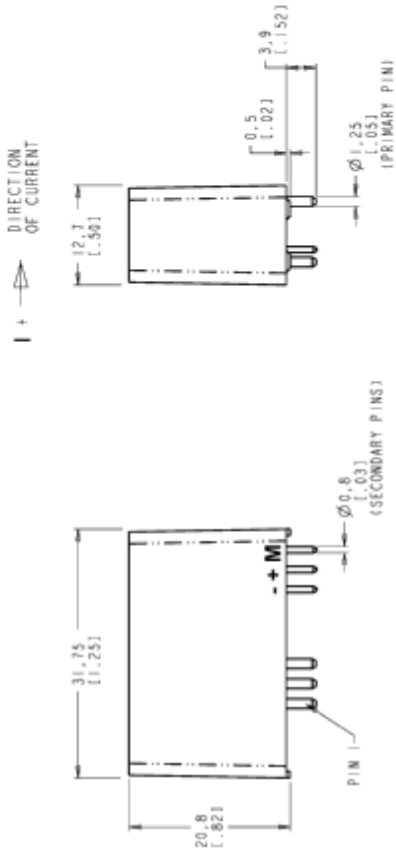

PRIMARY TURNS	PIN CONNECTIONS
1	1-6, 2-5, 3-4
2	1-5, 2-6, 3-4
3	1-4, 2-5, 3-6

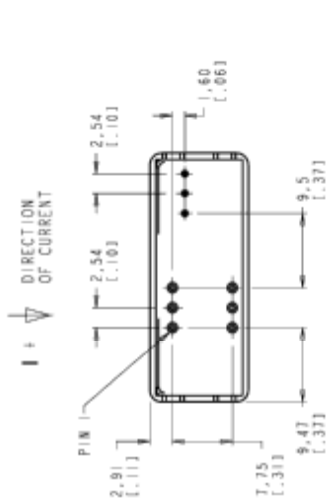

NOTES:

1. MOUNTING HOLES - PRIMARY PINS Ø1.45mm (0.057)
2. MOUNTING HOLES - SECONDARY PINS Ø1.00mm (0.039)